


AVENIO Edge System

Technical specifications

General

Configuration	Floor model
Throughput per run	Varies by workflow protocols
Runtime	Please refer to AVENIO Edge System User's Assistance and IFU for more information
Setup time	Approximately 20 mins prior to run
Inventory check	Pre-run consumable list. Pre-run check for empty positions and incorrectly placed items
Quality control on deck	Fluorescence-based quantification method
Barcodes	2D imager scans for 2D and 1D barcodes
Regulatory label	US-IVD, CE-IVD

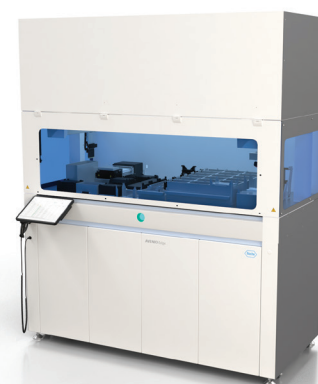

Kits and applications

Reagent design	Pre-filled, barcoded, ready-to-use. Reagent kits are optimized for 3 runs.
Sample type	Extracted DNA samples
Workflow	Hybridization-based library preparation and target enrichment

AVENIO Edge software and connectivity

Traceability	21 CFR part 11 (subsection B), audit trail, process monitoring, user guidance
Data export	CSV, XML and PDF run exports. Sample input in .csv format
Interfaces	2 external USB ports and 1 network port
Connectivity	HL7 LIS connection, Roche remote service solution

Deck capacity

Consumables	17 tip racks of 96 tips each, supporting 3 tip types (50 / 200 / 1000 μ L) 6 processing plates 5 processing lids 2 quantification plates 2 tip parks 4 panel tubes (to reconstitute custom panels)
Reagents	15 control mini racks; each rack includes 4 individual 2.0 ml tubes 10 troughs 20 cooled reagent tubes, 0.5 or 2.0 mL 2 primer plates
Inputs	1 MagNA Pure 96 output plate or 12 MagNA Pure 24 8-tube strips, low or high profile, or 1 processing plate

AVENIO Edge System

Technical specifications

Hardware

Instrument footprint (WxDxH)	1652 mm x 834 mm x 2043 mm 65 in x 33 in x 80 in
Operating space (WxDxH)	1952 mm x 1934 mm x 2100 mm 77 in x 76 in x 83 in
Construction and service space (WxDxH)	2850 mm x 3000 mm x 3000 mm 112 in x 118 in x 118 in
Weight	560.9 kg 1236.3 lbs
Contamination control	Work deck layout optimized to minimize contamination risk, UV light, optimized pipetting parameters with each TDF
Pipetting head	Single 8-channel pipetting head
Cooling block	2 °C–8 °C 36 °F–47 °F
On-deck thermocycler	Temperature range thermal block: +4°C to +99°C Temperature range heated lid: +30°C to +115°C Maximum average heating rate: 4.4°C /sec Maximum average cooling rate: 2.2°C /sec Temperature accuracy: ±0.3°C at 55°C Temperature uniformity: ±0.2°C at 55°C, 72°C, 95°C
Quantification module	High-performance multimode plate reader powered by a monochromator

Power and environmental requirements

Maximum pressure	< 1 MPa on floor for each foot
Ambient room temperature	15 °C–30 °C 59 °F–86 °F
Operating humidity	30–80%
Power requirement	110–240 VAC, 50/60 Hz (200 VAC between phases for Japan)

For more information about AVENIO Edge System, please visit sequencing.roche.com/AVENIOEdge

Roche Sequencing Solutions, Inc.
9115 Hague Road
Indianapolis, IN 46256

sequencing.roche.com

AVENIO is a trademark of Roche.

© 2021 Roche Sequencing Solutions, Inc. All rights reserved. MC-US-15787 12/21